

# **Brazil jam72d40 lb**





## Brazil jam72d40 lb

---



### JA Solar JAM72D40/LB 595W Bifacial Double Glass ...

JA Solar JAM72D40/LB 595W Bifacial Double Glass Silver Frame (JAM72D40-595/LB) Article No: 14992 Manufacturers part number JAM72D40-595/LB Technical information : Module type Bifacial Framed Watt 595 Module surface ...



### DeepBlue 4.0 Pro JAM72D40-590-615/LB

JA Solar Technology Co., Ltd. Solar Panel Series DeepBlue 4.0 Pro JAM72D40-590-615/LB. Detailed profile including pictures, certification details and manufacturer PDF ENF Solar

### Datasheets

JAM72D40 570-595 MB. JAM72D40 580-605 LB. JAM72D42 615-640 LB (30mm) JAM72D42 615-640 LB (35mm) JAM72S20 445-470 MR. JAM72S30 540-565 MR. JAM72S42 620-645 LR. Link para consulta de registros do Inmetro: <https://registro metro.gov /consulta/> Conheça nossa sede Brasil. Av. 9 de Julho, 3575 .



### JA Solar JAM72D40-590/LB-ITS 590W Solar Panel Silver ...

The JA Solar JAM72D40-590/LB-ITS is a 590W n-type Double Glass Bifacial Solar Panel with a silver frame. Part of the Deep Blue 4.0 Series, the panel offers high power & efficiency, lower degradation and better low-light performance. ...




### LIQUID COOLING ENERGY STORAGE SYSTEM

EMS real-time monitoring  
No container design  
flexible site layout



Cycle Life **≥ 8000**      Nominal Energy **200kwh**      IP Grade **IP55**

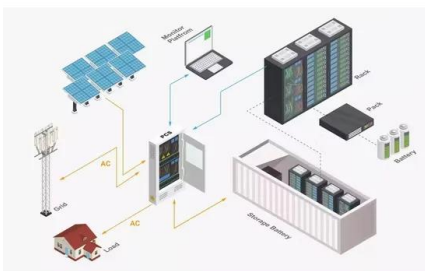

### JA Solar JAM72D40/LB 595W Bifacial Double Glass Silver Frame

JA Solar JAM72D40/LB 595W Bifacial Double Glass Silver Frame (JAM72D40-595/LB) Article No: 14992 Manufacturers part number JAM72D40-595/LB Technical information : Module type Bifacial Framed Watt 595 Module surface (m<sup>2</sup>) 2,646 Watt/m<sup>2</sup> 225,0 Cell Half-cut Number of cells 144 (72) Cell Technology TOPCon N-Type Temp.

### JA Solar JAM72D40-590/LB-ITS 590W Solar Panel Silver

The JA Solar JAM72D40-590/LB-ITS is a 590W n-type Double Glass Bifacial Solar Panel with a silver frame. Part of the Deep Blue 4.0 Series, the panel offers high power & efficiency, lower degradation and better low-light performance. Panels in this range are protected by a 12 year product warranty and a 30 year linear power output warranty.


#### HEAT DISSIPATION

Cold aisle containment, making optimal refrigeration effect;




### JAM72D40-580/LB

The JAM72D40-580/LB from JA Solar is a Solar Panels with Output Power 580 W, Output Voltage 43.06 V, Output Current 13.47 A, Temperature Operating Range -40 to 85 Degree C. Tags: Panel. More details for JAM72D40-580/LB can be seen below.

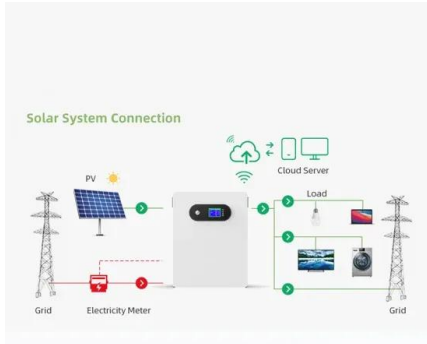

## JAM72D40 575-600 LB

JAM72D40 -575/LB 575 51.40 42.88 14.16 13.41  
 21.7 JAM72D40 -580/LB 580 51.60 43.06 14.23  
 13.47 21.9 30±1 Units: mm 10:1 L Short frame  
 33 Long frame JAM72D40 -585/LB 585 51.80  
 43.24 14.29 13.53 22.1 JAM72D40 575-600/LB Bii  
 SPECIFICATIONS Cell Weight Dimensions Cable  
 Cross Section Size No. of cells Junction Box  
 Connector Cable Length

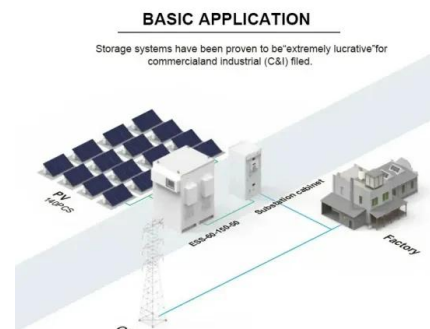

## JA Solar Deep blue 4.0 Pro JAM72D40-585/LB Glass-Glass Bifacial

Offering compatibility with system voltages of up to 1500 volts, the JAM72D40-585/LB (BIFACIAL, SFR) solar module empowers your solar energy system with reliable and optimized ...

## JAM72D40 575-600 LB

JAM72D40 575-600/LB/1500V Stäubli  
 MC4-EVO2A/MC4-EVO2 QC Solar QC 4.10-351/QC  
 4.10-35 Country of Manufacturer China/Vietnam  
 JAM72D40-575/LB/1500V  
 JAM72D40-580/LB/1500V  
 JAM72D40-585/LB/1500V  
 JAM72D40-590/LB/1500V  
 JAM72D40-595/LB/1500V  
 JAM72D40-600/LB/1500V Measurement tolerance

### Lithium battery parameters

Product capacity: 100Ah

Product size: 135\*197\*35mm

Product weight: 1.82kg

Product voltage: 3.2V

internal resistance: within 0.5





at STC: Pmax  $\pm 3\%$ , Voc  $\pm 3\%$  and Isc  $\pm 4\%$ . ...



### **JA Solar Deep blue 4.0 Pro JAM72D40-585/LB Glass-Glass Bifacial**

Offering compatibility with system voltages of up to 1500 volts, the JAM72D40-585/LB (BIFACIAL, SFR) solar module empowers your solar energy system with reliable and optimized performance. Built to withstand rough weather conditions, this solar module can endure snow loads of up to 5400 Pa and wind loads of up to 2400 Pa, guaranteeing long

## **Contact Us**

---

For catalog requests, pricing, or partnerships, please visit:  
<https://www.fundacja64.pl>