

UI 550m 144hv Ghana





UI 550m 144hv Ghana



Ulica Solar UL-550M-144HV Full Black 1500V UL-540-550M-144HV

12% more power than conventional modules. Lower power degradation. Lower internal current. Lower hot spot temperature. Cell crack risk limited in small region. enhance the module ...

DataSheet Modulo Ulica 550Wp , PDF

The document provides specifications for three photovoltaic modules: UL-540M-144HV, UL-545M-144HV, and UL-550M-144HV, listing their power, size, weight, and other technical details. Ningbo Ulica Solar Co., Ltd produces high quality solar cells and modules ranging from off-grid to on-grid systems for residential and commercial use.



UL-540-550M-144HV(Half-cut)

The UL-540-550M-144HV (Half-cut) is designed to withstand harsh weather conditions, including heavy snow and wind loads of up to 2400Pa. The module also has a salt mist and ammonia resistance certification, making it suitable for installation in coastal and agricultural areas.

Monocrystal 550 Watt ULICA UL-550M-144HV Monocrystal Panel

Ulica 550 watt monocrystalline solar panel model UL-550M-144HV is one of the types of



monocrystalline panels of ULICA company . This panel has dimensions of 2279x1134x35 mm ...



DataSheet Modulo Ulica 550Wp , PDF

The document provides specifications for three photovoltaic modules: UL-540M-144HV, UL-545M-144HV, and UL-550M-144HV, listing their power, size, weight, and other technical details. Ningbo Ulica Solar Co., Ltd produces high quality ...

ULICA SOLAR PV PANEL BIFACIAL MONO PERC 550W , Optonica ...

UL-550M-144HV; Light Color None; EAN Code 3800156694125; Dimension 2279x1134x35mm; Rated Maximum Power 550W; Open-Circuit Voltage 50V; Short-Circuit Current 13.75A; Maximum System Voltage 1500V; All technical standard test condition AM1.5 E=1000W/m² Tc=25°C; Weight 27.5kg; Maximum Power Voltage 41.9V;



Ulica Solar UL-550M-144HV Full Black 1500V UL-540-550M-144HV

12% more power than conventional modules. Lower power degradation. Lower internal current. Lower hot spot temperature. Cell crack risk limited in small region. enhance the module reliability. Outstanding mechanical load resistance. Snow load 5400Pa (Frontside) and




Wind load 3800Pa (Backside). High performance under low light conditions. Cloudy days, rainy days. Double EL ...



Ulica Solar UL-550M-144HV Black Frame 1500V

Global Tier 1 brand as announced by Bloomberg NEF. Lower LCOE. Lower shading and resistive loss. Lower temperature coefficient. Outstanding mechanical load resistance. 3800Pa wind ...

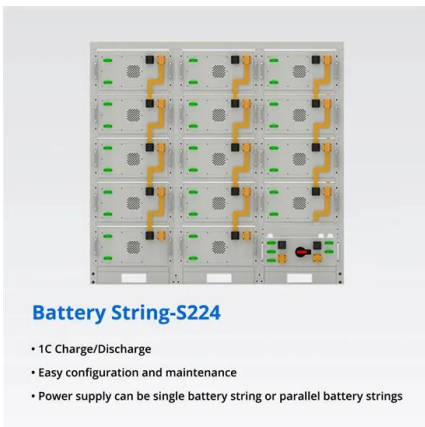

Monocrystal 550 Watt ULICA UL-550M-144HV Monocrystal Panel

Ulica 550 watt monocrystalline solar panel model UL-550M-144HV is one of the types of monocrystalline panels of ULICA company . This panel has dimensions of 2279x1134x35 mm and its weight is 28.3 kg on average.

UL-540-550M-144HV(Half-cut)

The UL-540-550M-144HV (Half-cut) is designed to withstand harsh weather conditions, including heavy snow and wind loads of up to 2400Pa. The module also has a salt mist and ammonia resistance certification, making it suitable ...





Photovoltaic module Ulica Solar UL-550M-144HV 550W Silver

Model: UL-550M-144HV, Series: UL-144HV
540-550 Watt, Manufacturer: Ulica Solar,
Maximum Power (Pmax): 550 W, Frame colour:
Silver, Maximum System Voltage: 1500 V

ULICA SOLAR PV PANEL BIFACIAL MONO PERC 550W , Optonica ...

UL-550M-144HV; Light Color None; EAN Code
3800156694125; Dimension 2279x1134x35mm;
Rated Maximum Power 550W; Open-Circuit
Voltage 50V; Short-Circuit Current 13.75A; ...



Ulica Solar UL-550M-144HV Black Frame 1500V

Global Tier 1 brand as announced by Bloomberg
NEF. Lower LCOE. Lower shading and resistive
loss. Lower temperature coefficient. Outstanding
mechanical load resistance. 3800Pa wind load,
5400Pa snow load. Anti-PID(potential introduced
degradation). Passed anti-PID test under 85%
damp heat, 85% relative humidity for 96hours.
Great Durability against extreme conditions. ...

Contact Us

For catalog requests, pricing, or partnerships, please visit:
<https://www.fundacja64.pl>